


## Tunable White COB (Two layers)

## Solder-less Connector

GoldiLED COB + ① WG Heatsink + ② WG Connectors + ③ Lock Spring + ④ Reflector with 3 Slots Hole + ⑤ Colour Filter / Honey Comb / Glass Lens + ⑥ Holding Trim  
= WG LED supporting package for basic fixture structure

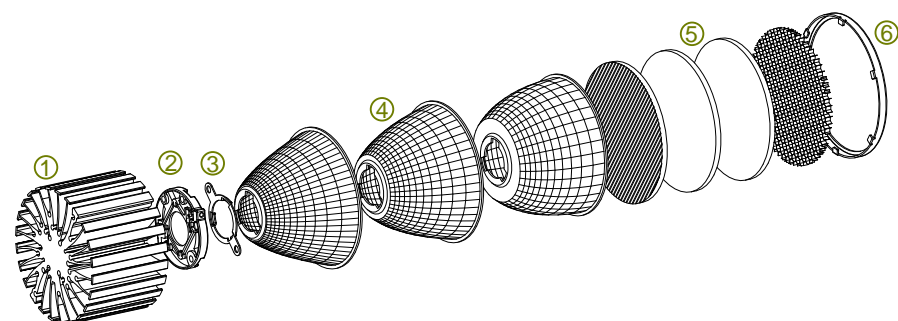

Widegerm Components would support key LED partners for full set arrangement. Manufacturers or COB users could find a one stop professional service and support from Widegerm.


Tel: (+852) 2367 9268 WhatsApp: (+852) 9837 0831 E-mail: info@widegerm.com.hk  
Web: http://www.widegerm.com.hk  
Hong Kong Office: Flat A, 3/F., Tak Wing Ind. Building, 3 Tsun Wen Rd., Tuen Mun, N.T., Hong Kong  
China Factory: Building 1, GuanShu Science and Technology Park, Wang Sha Road, Hong Mei Town, DongGuan City, China



Scene Mode Controller




Two Channels Driver (CCT Tunable & Dimmable)

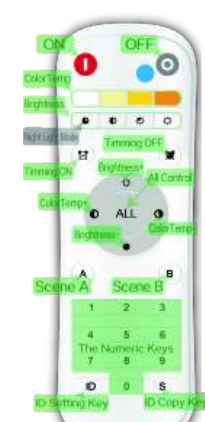

Remote Control

### Multi-functional Remote control RF-2.4G

- Dimming 20%-100%
- Colour tuning from 1800K-6000K
- Two scenes recall
- 1-99 groups of lamps control
- Timer
- ON / OFF

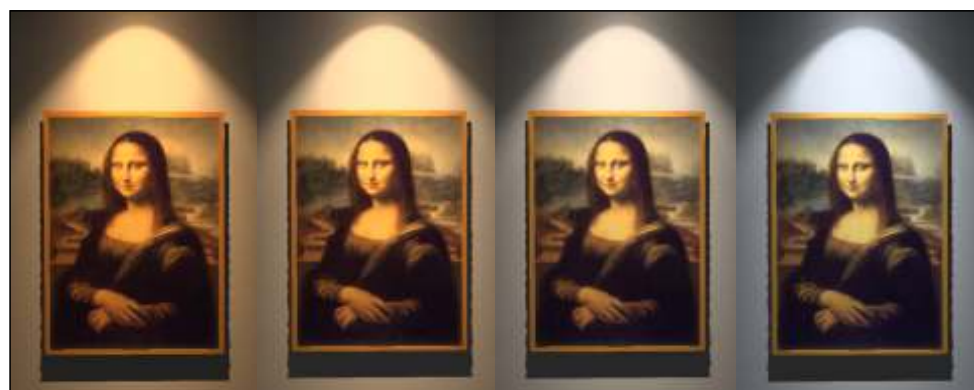

## WG LED Package + GoldiLED COB

**CT/TM 6-9**

OD:72mm

2201-TX 2202-TX 2207-TX

2094-TX 2095-TX 2096-TX

Colour Filters are Available in Red, Yellow, Green & Blue etc.

Colour Filters

Honey Comb

Elongation Lens

**CD/TM 14-18**

OD:82mm

3208-TX 3150-TX

3167-TX 3168-TX

3158-TX 3163-TX 3159-TX

Colour Filters are Available in Red, Yellow, Green & Blue etc.

Colour Filters

Honey Comb

Elongation Lens

**CD/TM 22**

OD:111mm

4201-TX 4301-TX 4401-TX

4219-TX 4220-TX 4221-TX

OD:121mm

4185-TX 5142-TX

Colour Filters are Available in Red, Yellow, Green & Blue etc.

Colour Filters


Honey Comb

Elongation Lens

## LED Reflector



## GoldiLED COB Series



Serial Number	Part Number	Picture	Beam Angle	Lamp Hole	Array's model	Measurments
1	2094-TX		8°	Ø22.5	TX1207	
2	2095-TX		18°	Ø22.5	TX1207	
3	2096-TX		54°	Ø22.5	TX1207	
4	3150-TX		16°	Ø22.5	TX2020	
5	3205-TX		33°	Ø22.5	TX2020	
6	3208-TX		44°	Ø22.5	TX2020	
7	4219-TX		17°	Ø22.5	TX2020	
8	4220-TX		31°	Ø22.5	TX2020	
9	4221-TX		40°	Ø22.5	TX2020	
10	4201-TX		14°	Ø29	TX2832	
11	4301-TX		30°	Ø29	TX2832	
12	4401-TX		41°	Ø29	TX2832	